WIRING HARNESS LAYOUT

the CAT srm synthesizer
by OCTAVE Electronics Inc.

POWER — ON OFF

BYPASS — VOLUME — VCA

NOISE LEVEL

KEYBOARD CONTROL — OFF — 1V/OCTAVE
VCO 1 AUDIO — ON OFF
S·H — VCO 1
MODULATION DEPTH — VCF
Q
Fc
15

SYNC — ON OFF
FINE TUNE
S·H — VCO 1
MODULATION DEPTH — VCO 2
AUDIO LEVEL
SUB OCTAVE
9
13

FREQUENCY — 0.2Hz COARSE 2kHz — FINE
KEYBOARD CONTROL — POLY OFF MONO
PULSE WIDTH
S·H — VCO 2
MODULATION DEPTH — VCO 1
AUDIO LEVEL
SUB OCTAVE
7
8
14
11
12
10

TRANSIENT GENERATORS
A D S R
ADSR REPEAT — GATED OFF AUTO
SAMPLE HOLD — VCO1 NOISE
LFO DELAY — 5 SEC — 0
5

PITCH BEND
OCTAVE SHIFT
GLIDE — MAX MIN
LFO FREQ — 30Hz 0.03Hz

TRIMMER LOCATIONS

1. Gate 2 Adj.
2. Keyboard Current
3. Pitch Bend Cal.
4. Octave Transpose Cal.
5. ADSR Attack time
6. Poly/Mono Balance
7. CV 2 V/OCT
8. VCO 1 Range
9. CV 1 V/OCT
10. VCO 1 Triangle Symmetry
11. VCO 1 Initial Pulse Width
12. VCO 2 Pulse Width
13. VCO 2 V/OCT
14. VCO 2 Range
15. VCF V/OCT
16. VCA Control Reject

CAT SRM CALIBRATION PROCEDURE

The following test equipment is required in order to perform calibration of the instrument.

1. A high input impedance digital voltmeter of at least $3\frac{1}{2}$ digit accuracy.
2. A DC coupled, triggered oscilloscope.
3. A digital frequency counter, strobe tuner, or suitable frequency standard.
4. An amplifier with speaker or headphones capable of high fidelity.

Before beginning the calibration procedure, the following steps must be taken.

1. Be sure that the instrument has warmed up for at least one half hour.
2. Connect the audio output to a monitor amplifier.
3. Center the Octave Shift switch and Pitch Bend controls.
4. Be sure that all modulation controls and glide are fully off.
5. "Fc" control fully up and "Q" control fully down.
6. VCA switch is in the BYPASS position.
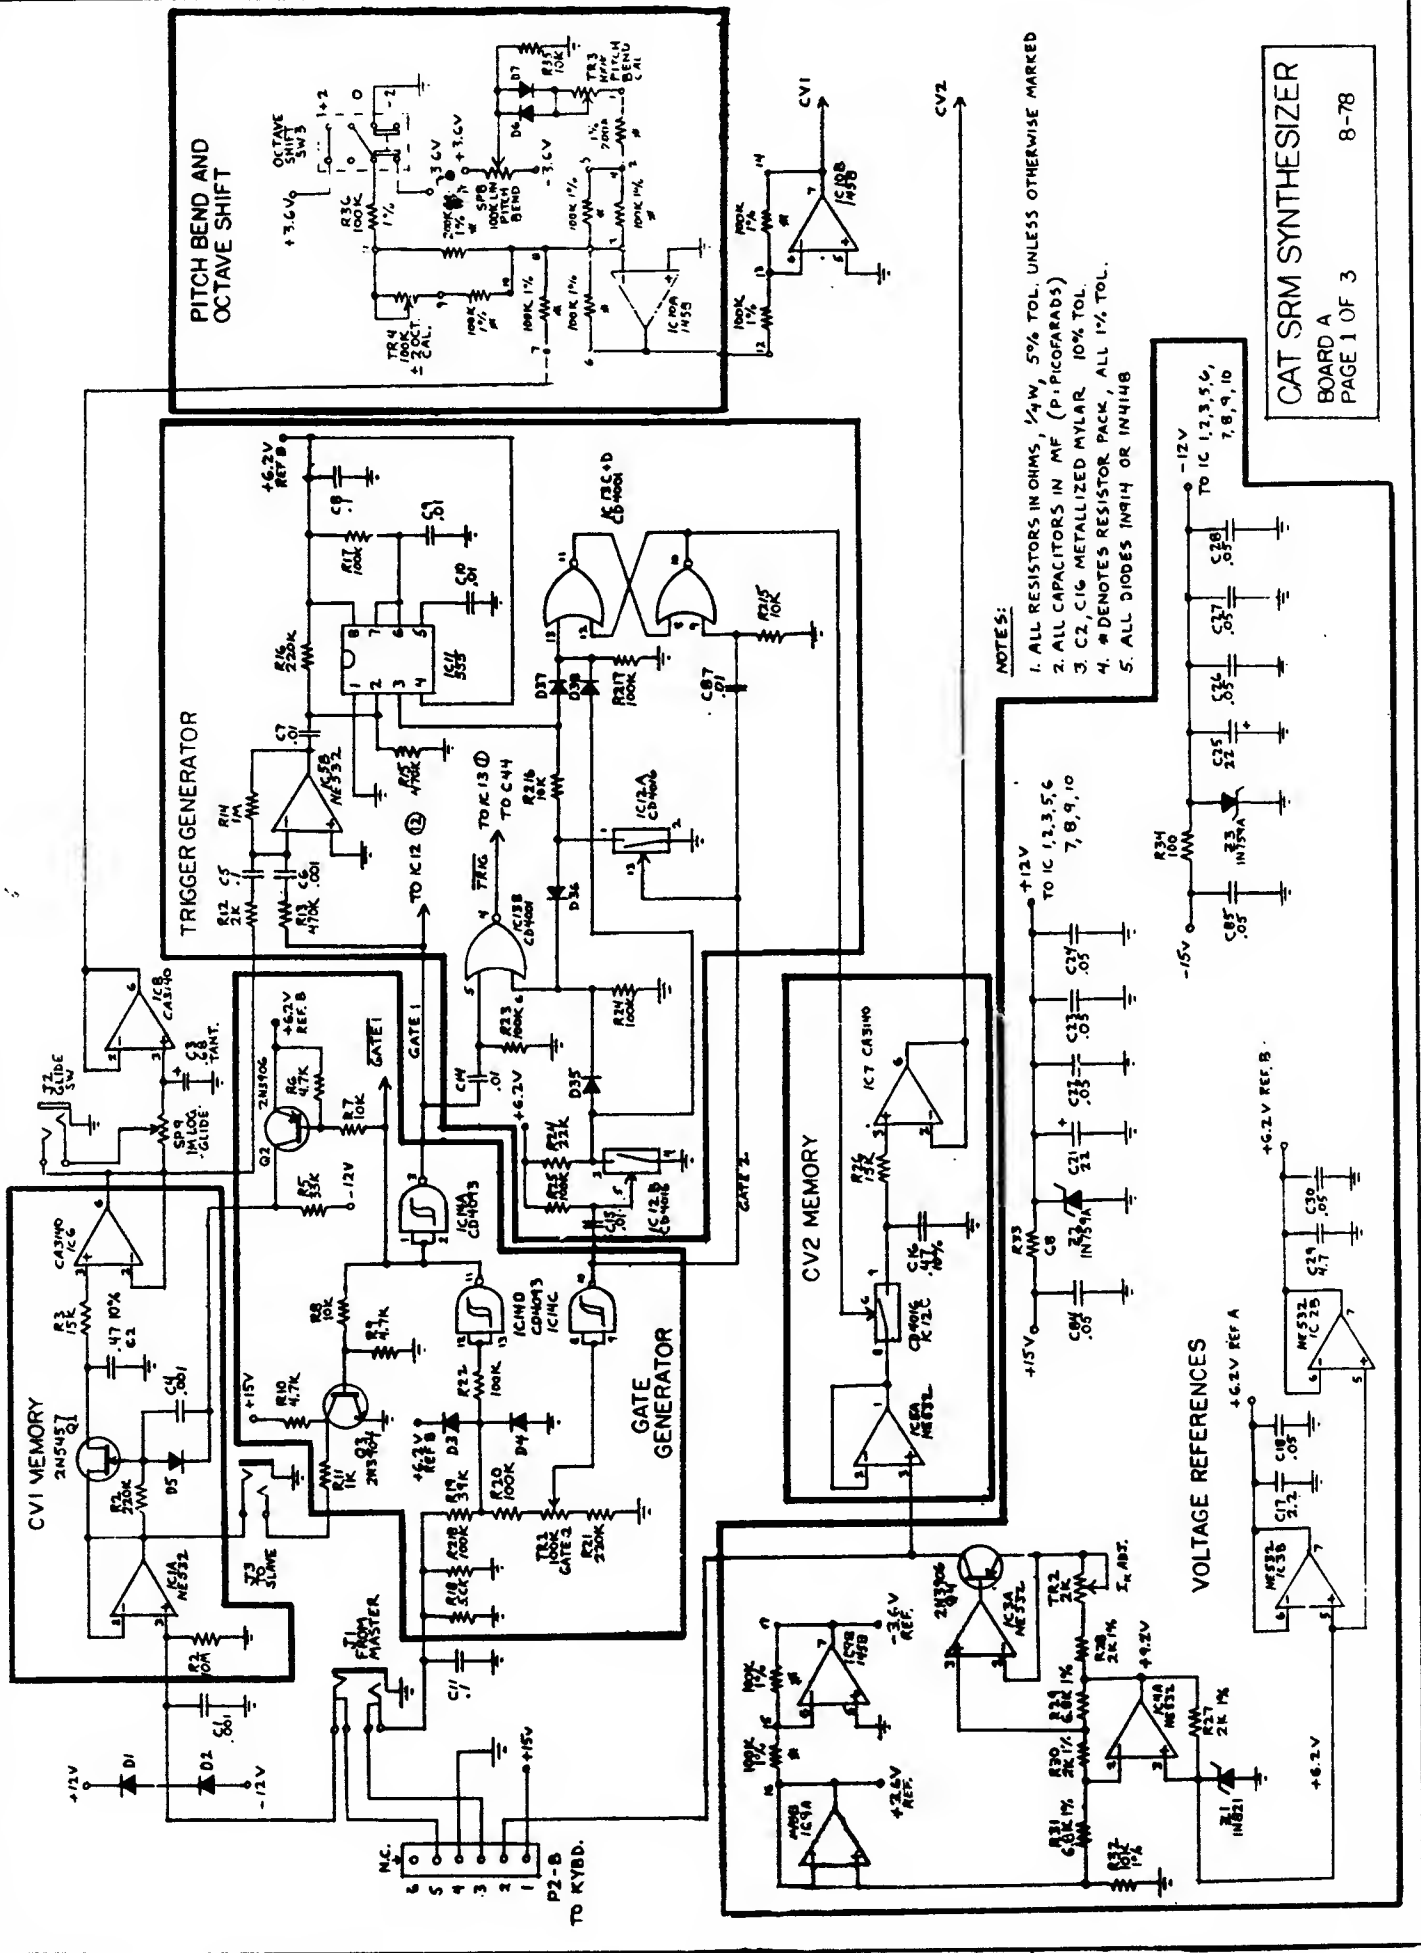7. All pedal inputs disconnected.

NOTE: CALIBRATION MUST BE PERFORMED IN THE SEQUENCE PRESENTED.. FAILURE TO DO SO WILL
      RESULT IN AN IMPROPERLY TUNED INSTRUMENT.

TRIMMER	ADJUSTMENT	PROCEDURE
2	KEYBOARD CURRENT	1. Monitor the CONTROL VOLTAGE output (ring of the TO SLAVE output jack) with a digital voltmeter. 2. Adjust the KEYBOARD CURRENT TRIMMER for a difference of exactly 3.000 volts between the highest and lowest keys depressed on the keyboard.
8	VCO 1 RANGE	1. Place the KEYBOARD CONTROL switch in the MONO position. 2. Turn up the VCO 1 sawtooth slider. 3. Set the VCO 1 COARSE and FINE TUNE controls to the 12 o'clock position. 4. Pin A2 on the keyboard. 5. Adjust the VCO 1 RANGE TRIMMER until the frequency of VCO 1 is approximately 440 Hz.
14	VCO 2 RANGE	1. Turn up the VCO 2 sawtooth slider. 2. Set the VCO 2 TUNE control to 12 o'clock. 3. Pin A2 on the keyboard. 4. Adjust the VCO 2 RANGE TRIMMER until the frequency of VCO 2 is equal to that of VCO 1 (440 Hz).
13	VCO 2 V/OCT	1. Place the KEYBOARD CONTROL in the OFF position. 2. Pin high C on the keyboard. 3. Using the VCO 1 FREQUENCY controls, tune VCO 1 to VCO 2 until zero beat occurs. 4. Depress low C and adjust the VCO 2 V/OCT TRIMMER until

TRIMMER	ADJUSTMENT	PROCEDURE
		the frequency of VCO 2 is exactly three octaves below that of VCO 1. At this point, zero beat will occur. 5. Repeat steps 2, 3, and 4 until no further adjustment is necessary.
4	OCTAVE TRANSPOSE	1. Leave the VCO 1 KEYBOARD CONTROL switch in the OFF position. 2. Pin high C. 3. Tune VCO 1 and VCO 2 to zero beat. 4. Depress C2. 5. Place the OCTAVE switch in the +2 position. 6. Adjust the OCTAVE TRANSPOSE TRIMMER for zero beat between VCO 1 and VCO 2.
3	PITCH BEND	1. Repeat steps 1, 2, and 3 for the OCTAVE TRANSPOSE adjustment. 2. Depress C3. 3. Place the PITCH BEND slider in the +1 position. 4. Adjust the PITCH BEND TRIMMER for zero beat between VCO 1 and VCO 2.
9	CV 1 V/OCT	1. Place the KEYBOARD CONTROL switch in the MONO position. 2. Pin high C on the keyboard. 3. Turn up the VCO 1 and VCO 2 sawtooth sliders. 4. Depress low C with high C still pinned. 5. Adjust the VCO 1 FREQUENCY controls for zero beat between VCO 1 and VCO 2. 6. Release low C and adjust the CV 1 V/OCT TRIMMER for zero beat. 7. Repeat steps 2, 3, 4, 5, and 6 until no further adjustment is necessary.
7	CV 2 V/OCT	1. Place the KEYBOARD CONTROL switch in the POLY position. 2. Pin high C and depress low C. 3. Adjust VCO 1 frequency for zero beat with VCO 2. 4. Release low C with high C still pinned. 5. Adjust the CV 2 V/OCT TRIMMER until VCO 1 and VCO 2 are at zero beat. 6. Repeat steps 2, 3, 4, and 5 until no further adjustment is necessary.
6	POLY/MONO BALANCE	1. Place the KEYBOARD CONTROL switch in the POLY position. 2. Pin high C. 3. Tune VCO 1 and VCO 2 to zero beat. 4. Place the KEYBOARD CONTROL switch in the MONO position. 5. Adjust the POLY/MONO BALANCE TRIMMER for zero beat.

11	VCO 1 INITIAL PULSE WIDTH	1. Turn up the VCO 1 ⊓⊓ slider and turn all other audio sources fully off. 2. Check that the PULSE WIDTH control is fully off. 3. Monitor the synthesizer output with an oscilloscope. 4. Adjust the VCO 1 INITIAL PULSE WIDTH TRIMMER for 50% duty cycle.
12	VCO 2 PULSE WIDTH	1. Turn up the VCO 2 ⊔⊓ slider and turn all other audio sources fully off. 2. Using the same procedure for VCO 2 as in VCO 1, adjust the VCO 2 PULSE WIDTH TRIMMER for 50% duty cycle.
10	VCO 1 TRIANGLE SYMMETRY	1. Turn up the VCO 1 ∧∧ slider and turn all other audio sources fully off. 2. Monitor the output of the synthesizer with an oscilloscope. 3. Adjust the TRIANGLE WAVE SYMMETRY TRIMMER until the waveform is symmetrical.
5	ADSR ATTACK ADJ.	1. Place the "A" and "S" sliders of the ADSR fully up with the "D" and "R" sliders fully down. 2. Bring up the VCO 1 sawtooth slider and turn all other audio sources off. 3. Check that the ADSR REPEAT switch is in the OFF position. 4. Turn up the VCO 1 MODULATION CONTROL corresponding to the switch with the ADSR /⌐_ position fully clockwise. Be sure that this switch is in the ADSR /⌐_ position. 5. Place the OCTAVE switch in the -2 position and the PITCH bend control in the -1 position. 6. Depress C2 and adjust the ADSR TRIMMER for a smooth transition from the ATTACK to the SUSTAIN level. This will be evident as a rising pitch that smoothly levels off as a key is held down.
1	GATE 2 ADJ.	1. Pin low C on the keyboard. 2. Bring up a VCO 1 waveform slider and turn all other audio sources off. 3. Place the KEYBOARD CONTROL switch in the POLY position. 4. Place the VCA switch in the /⌐\ (AR) position. 5. Bring the "R" slider of the AR up one half with the "A" slider all the way down. 6. Strike each key above low C one at a time and adjust the GATE 2 TRIMMER so that each note holds pitch after the key is released. Be sure that the keyboard contacts are clean and properly adjusted before undertaking this calibration.

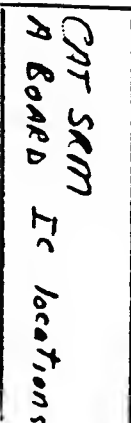| 15	VCF V/OCT	1. Turn all audio sliders fully off. 2. Bring up "Q" control so that VCF oscillates. 3. Turn up the VCF KEYBOARD CONTROL to maximum (1 V/OCT). 4. Pin A3 on keyboard. 5. Using the "Fc" control, adjust the VCF frequency to 1720 Hz. 6. Depress A1, and adjust the VCF V/OCT TRIMMER for 440 Hz. 7. Repeat steps 5 and 6 until no further adjustment is necessary.
16	VCA CONTROL REJECT	1. Connect an oscilloscope to the high audio output. 2. Turn up the VCA VOLUME to maximum. 3. Place the VCA switch in the $\frown\!\!\!\_\!\_$ (ADSR) position. 4. Bring all audio sliders, "Fc", and "Q" controls all the way down. 5. Bring the "S" slider of the ADSR up fully with all other ADSR sliders set to minimum. 6. Place the ADSR REPEAT switch in the AUTO position. 7. Bring up the LFO FREQUENCY slider to maximum. 8. Be sure that the VCF modulation controls are fully off and that no keys are pinned down. 9. Adjust the VCA CONTROL REJECT TRIMMER for minimum output.

CAT SRM SYNTHESIZER
BOARD A
PAGE 1 OF 3   8-78

CAT SRM
A BOARD IC locations

Resistor Pack

O GND
O CV OUT
O CV
} SLIDE SW
O Iₖ OUT

RP1 SP1 A 1 Meg log
SP2 D 1 Meg log
SP3 S 10k lin
SP4 R 1 Meg log

SP5 A 1 Meg log
SP6 D 1 Meg log
SP7 1 Meg log

SP8 BRND 100k lin
SP9 GLIDE 2 Meg log
SP10 100k log
SP11 SUB 100k log
SP12 2 100k log
SP13 2 100k log
SP14 π 100k log

SP15 SUB 100k log
SP16 2 100k log
SP17 2 100k log

IC1 IC2 IC3 IC4 IC5 IC6 IC7
IC8 IC9 IC10 IC11 IC12 IC13 IC14
IC19 IC20 IC21 IC22 IC23 IC24
IC27 IC29 IC30 IC31 IC32 IC33
IC34 IC35 IC36 IC37
IC...

Q1 Q2 Q4 Q7 Q8 Q9 Q10 Q11 Q12 Q14 Q15

TR1 TR2 TR3 TR4 TR5 TR6 TR7 TR8 TR9 TR10 TR11 TR12 TR13

SW1 SW2 SW3 SW4 SW5 SW6 SW7 SW8 SW9 SW10 SW11

RP1 RP2 RP3 RP4 RP5 RP6 RP7

LED

O GATE OUT
O GATE IN
O GATE TRIG
O GND
O +15V
O -15
O VCO 2 PEDAL IN

SW5
O CV
O NOISE
O S.H
O VCO1
O VCO2

LED 2

R163

SW6

RP4

R204

R205

R206

SW14

R207

TR16

R203

SW12

SW13

RP10

RP11

RP12

C76

R190

R185

R207

IC38

R167

R210

R175

R177

R202

R200

IC39

R198

C64

TR15

C75

R164

IC40

Q16

D34

C69

C71

R168

R161

D32

D33

R211

R162

R164

R165

C70

R142

R186

R196

R163

IC41

R183

R170

R184

R165

R170

R163

R176

R174

R169

R173

R213

R171

C73

C66

R174

R171

C65

R172

R193

R113

IC42

R177

R178

R180

C67

R181

R182

C68

SP18

SP19

SP20

CAT SRM SYNTHESIZER
BOARD B LAYOUT
PAGE 1 OF 1

CAT SRM SYNTHESIZER
BOARD A
PAGE 2 OF 3

CAT SRM SYNTHESIZER
BOARD A
PAGE 3 OF 3
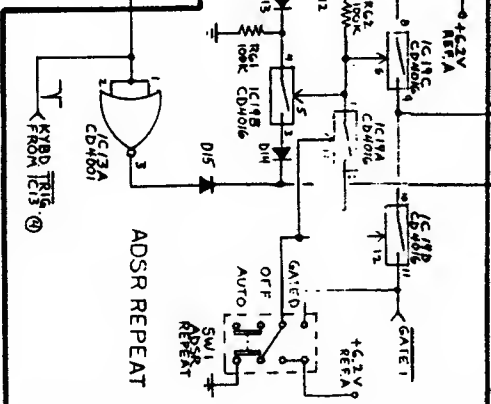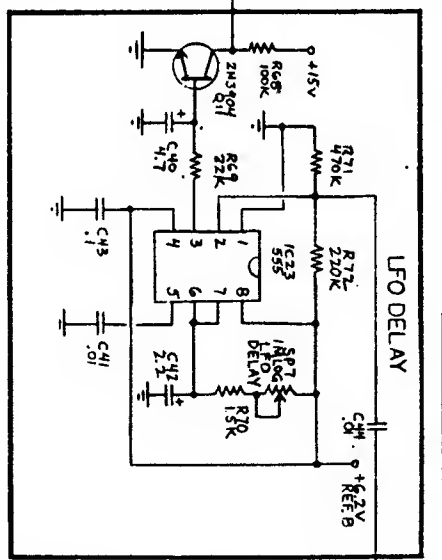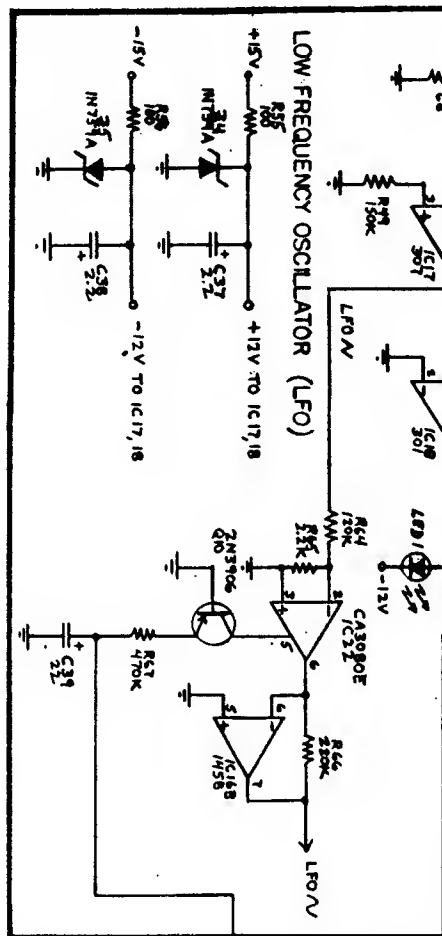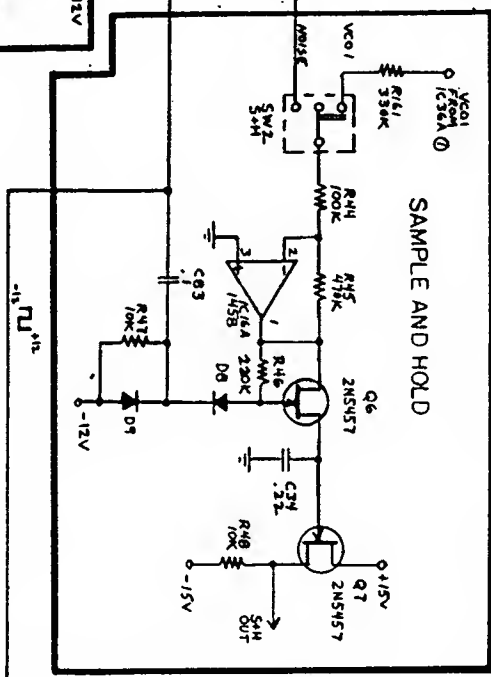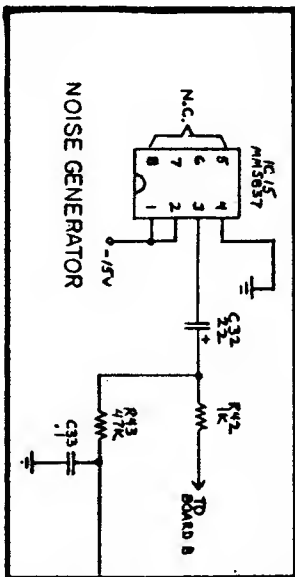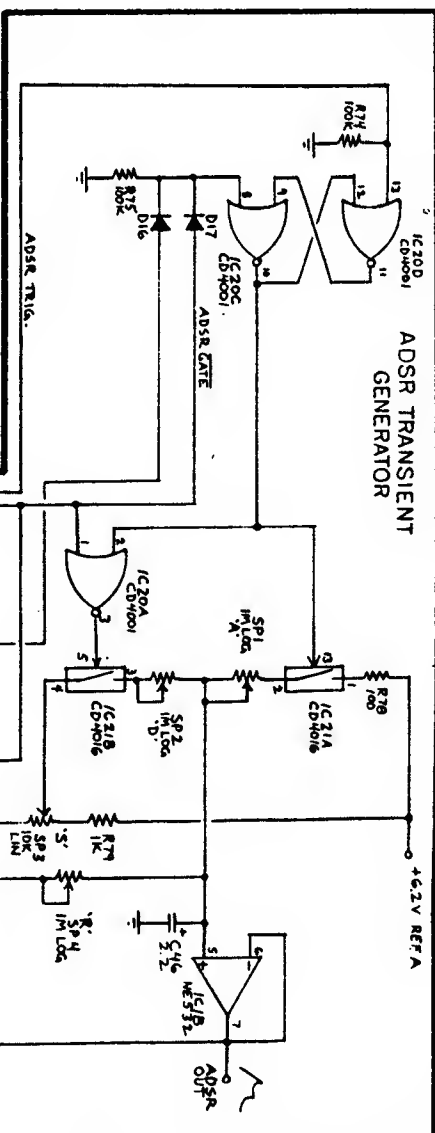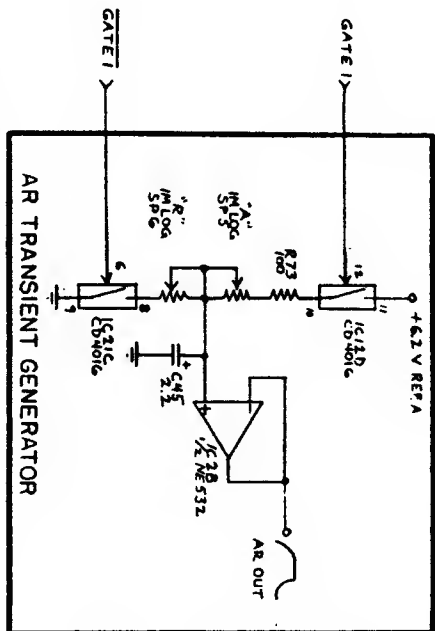
NOTES: UNLESS OTHERWISE MARKED –
1. ALL RESISTORS IN OHMS 1/4 W, 5% TOL.
2. ALL CAPACITORS IN MF (P= PICOFARADS).
3. ALL DIODES IN1N914/1N914B
4. # DENOTES RESISTOR PACK – 1% TOL.

CAT SRM SYNTHESIZER
BOARD B
PAGE 1 OF 1

NOTE: UNLESS OTHERWISE MARKED
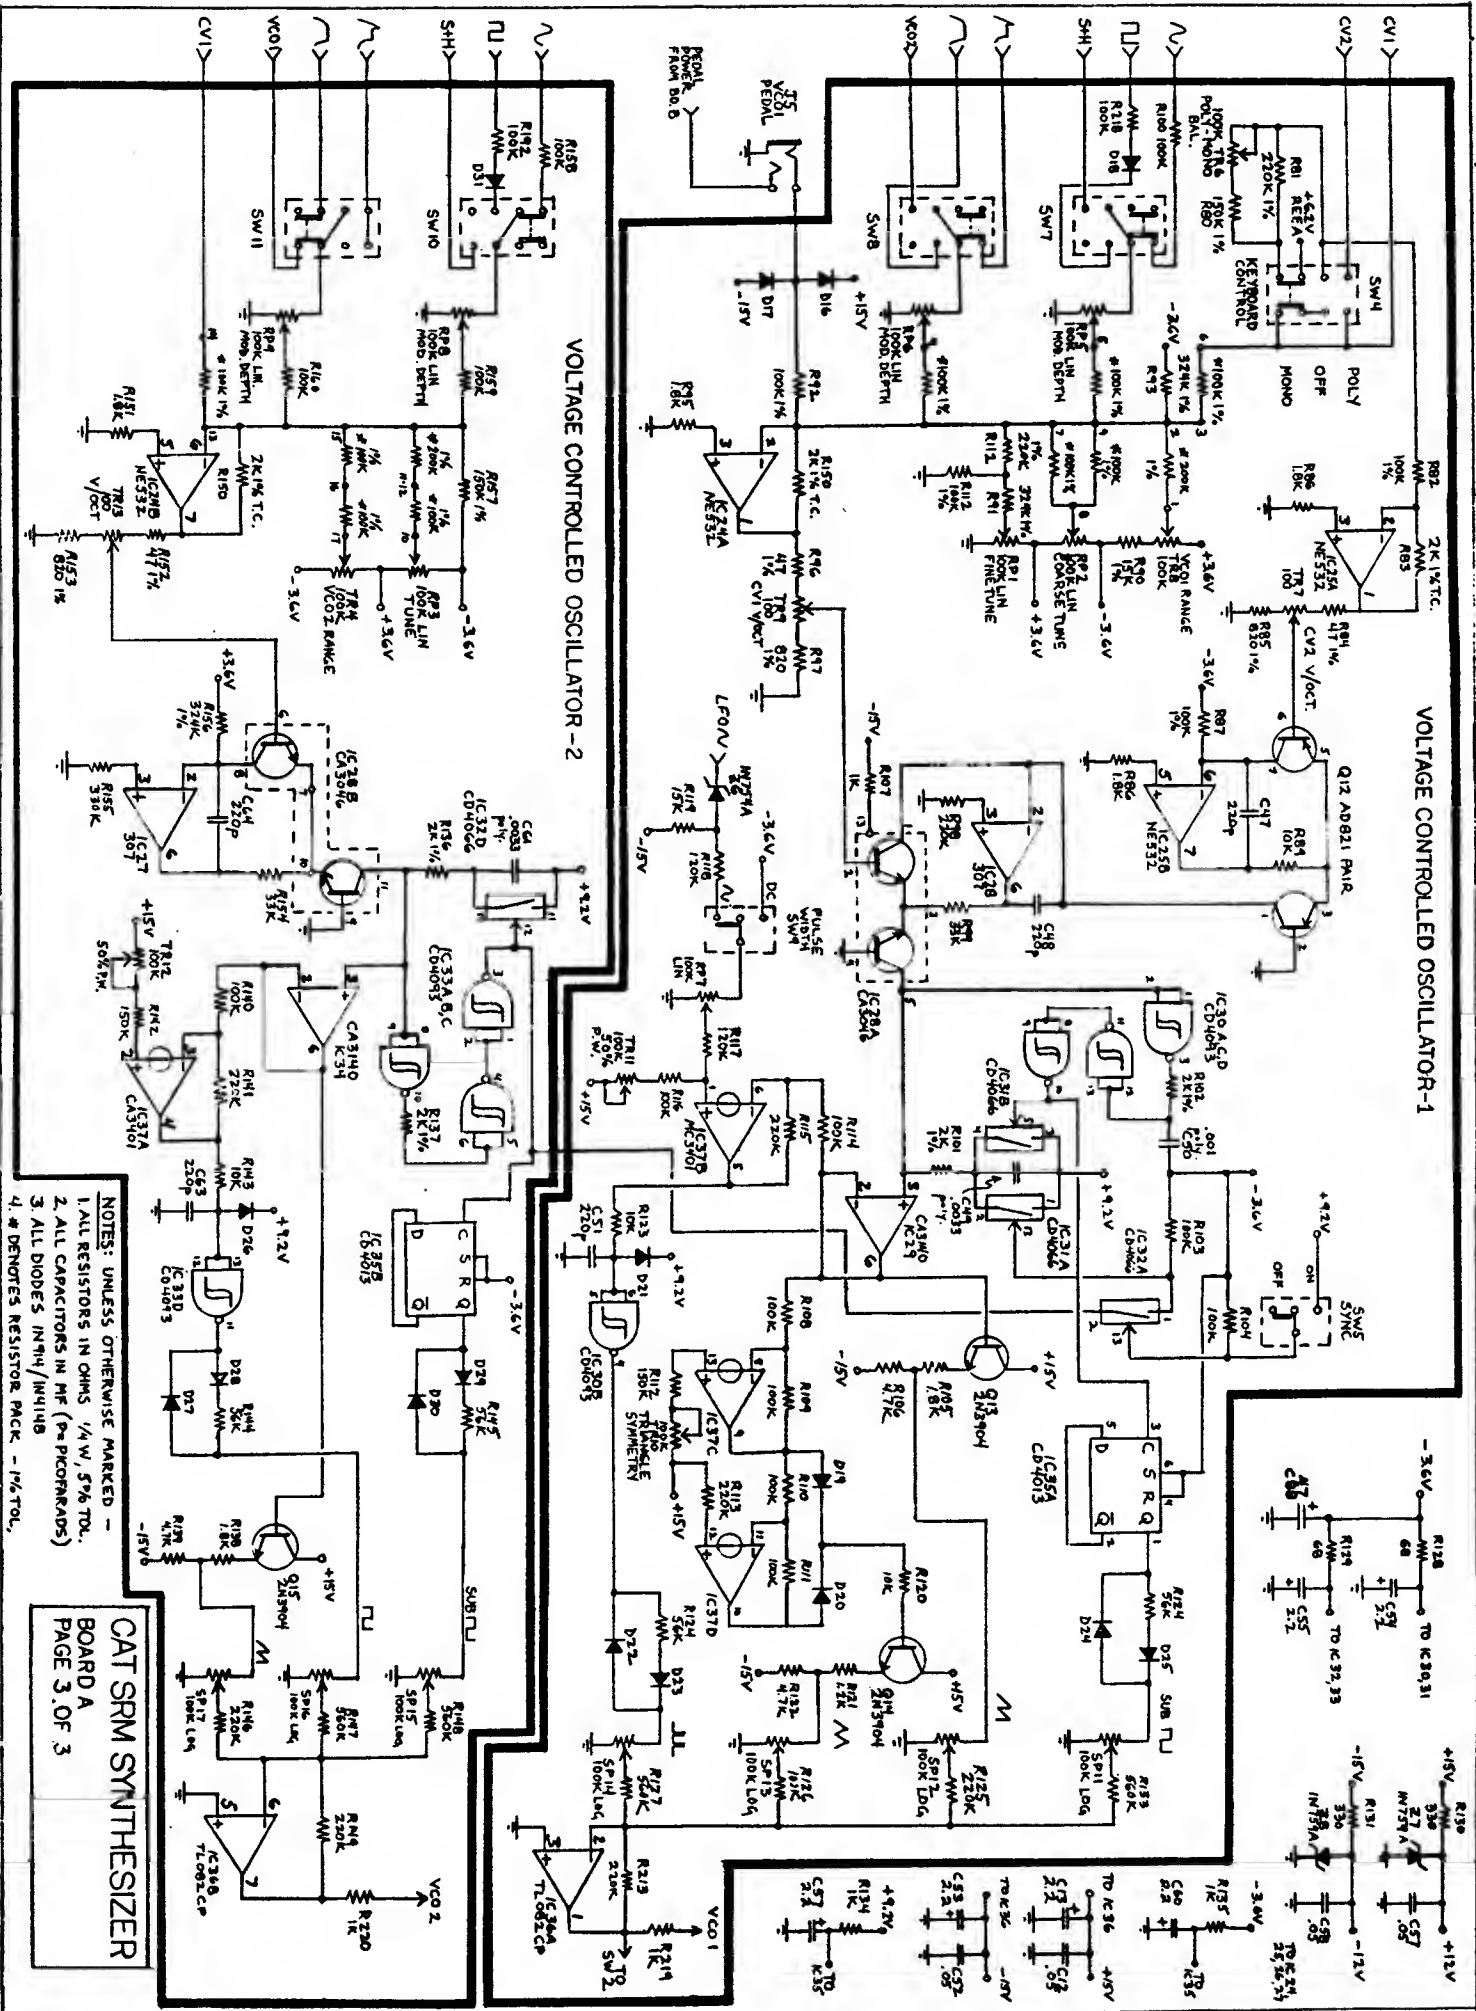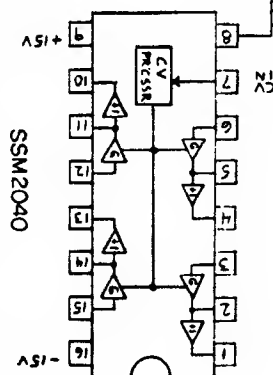1. ALL RESISTORS IN OHMS, ¼W, 5% TOL.
2. ALL CAPACITORS IN μF
3. ALL DIODES IN914 / IN4148

VOLTAGE CONTROLLED FILTER
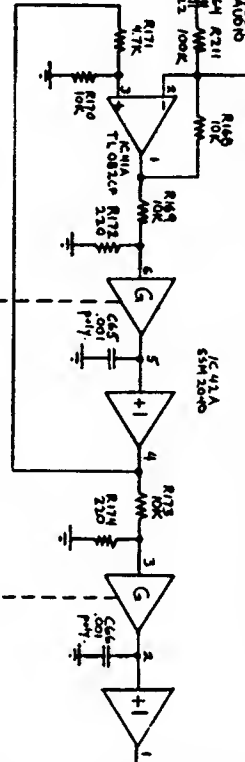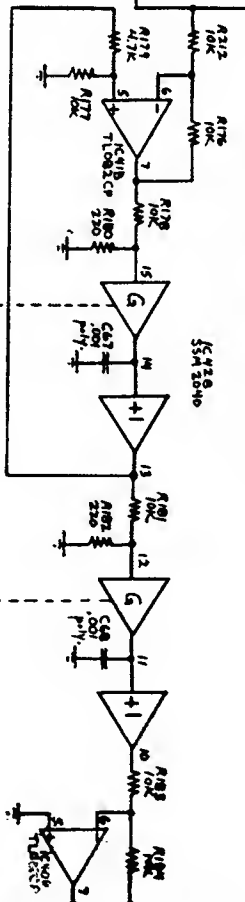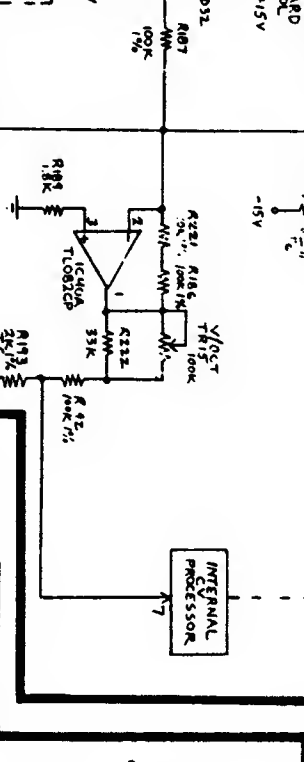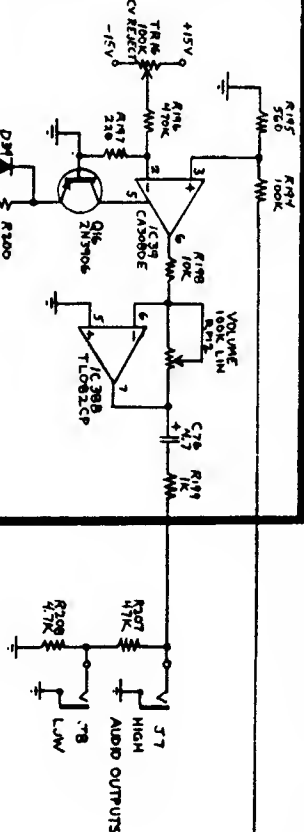
VOLTAGE CONTROLLED AMPLIFIER

SSM2040

MINI-MOOG
BOARD #2

WIRE TO
"CONTROL VOLTAGE
OUT" JACK

WIRE TO
"CONTROL
VOLTAGE IN
JACK

PIN 4A
PIN 5A

FIGURE

+10

330Ω

G'07

BREAK

EXISTING
MINI-MOOG
CIRCUITRY

3.9K

④ OUTPUT
TO OSC's

⑤ OUTPUT
TO FILTER

-10

ADDED
CIRCUITRY

CONTROL
VOLTAGE
OUT

CONTROL
VOLTAGE
IN

SCHEMATIC

MINI-MOOG
MODIFICATIONS
FOR USE WITH

OCTAVE Electronics Inc.

An Affiliate of Syn-Cordion Musical Instruments Corp.
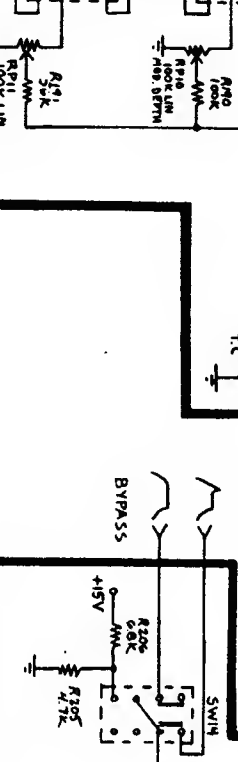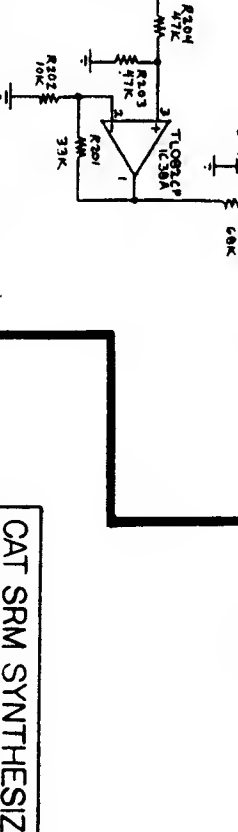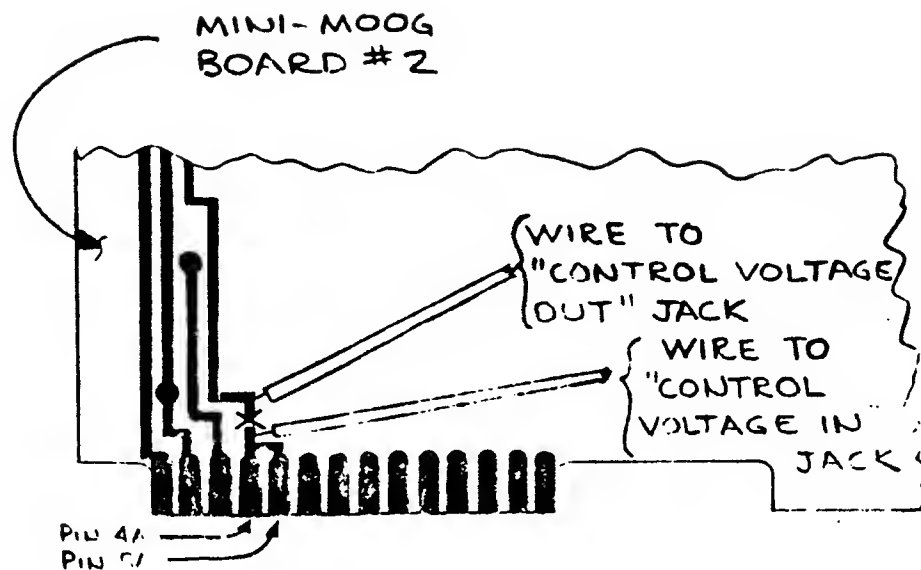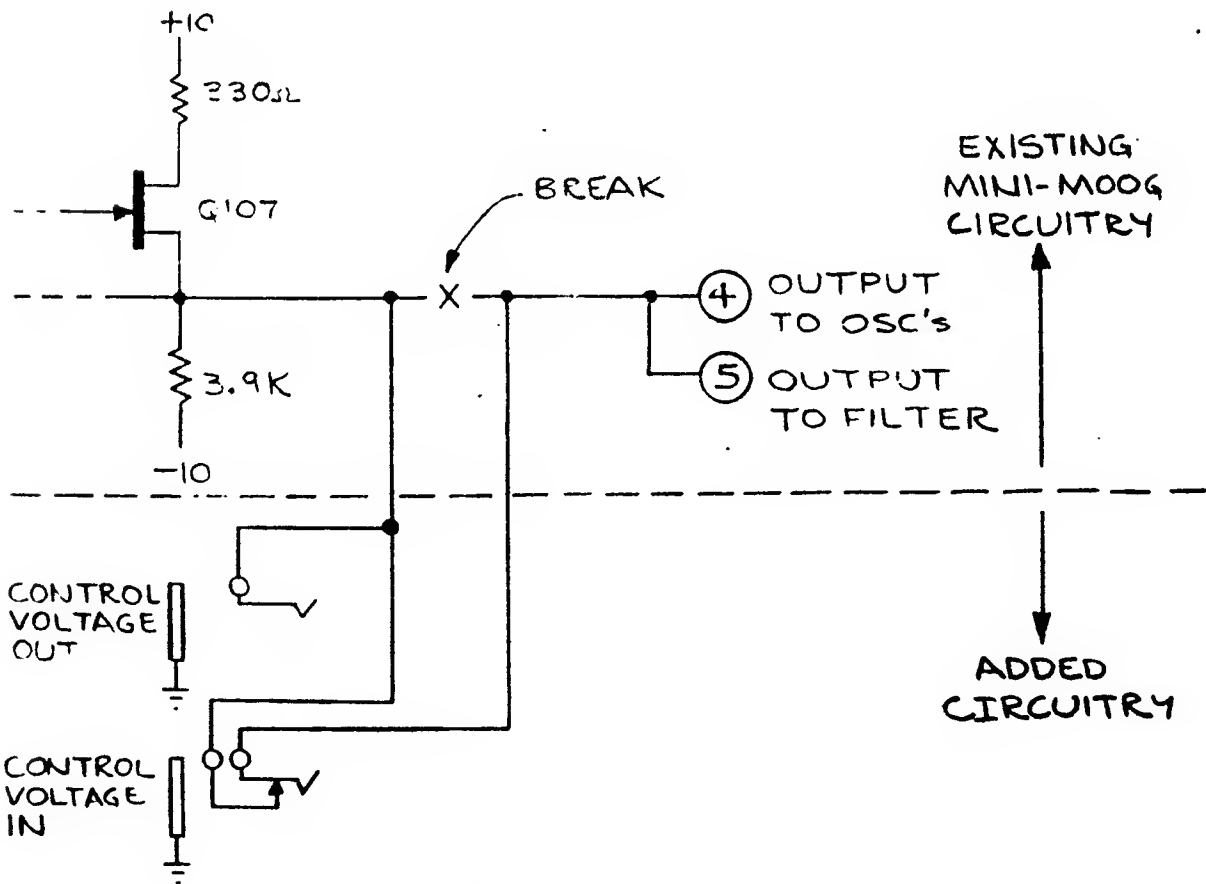
NOTICE: TO ALL OWNERS OF OCTAVE SYNTHESIZERS

To help make Octave Synthesizers better suit your personal needs, certain custom modifications are now available subject to the following terms:

1) All modifications must be performed by the factory only.

2) Shipping charges both to and from the factory must be prepaid by the customer.

3) A certified check or money order must accompany the unit or be mailed in advance.

4) Customer must contact the factory in writing for a RETURN AUTHORIZATION NUMBER prior to shipping the unit. Units with no return authorization number will be refused by the factory.

5) Modifications are guaranteed for 1 year parts and 90 days labor and are subject to the standard terms of the OCTAVE warrantee as supplied with the unit.

6) The factory reserves the right to select the orientation of panel control additions dependent upon space variations.

7) Along with the modification performed, the unit will be recalibrated and given a general check. No repairs will be performed unless the customer is notified.

A portion of the cost of a modification is due to the fact that the instrument has to be dismantled and reconstructed in order to gain access to the modified areas. Because of this, several modifications performed on the same unit at the same time will be less expensive than those modifications done separately.

In view of this, the following discounts apply to multiple modifications performed on the same unit at the same time:

> First modification: Price as listed
> Each add'l modification: Less $10.00 per modification

Please inquire in writing about any modifications not listed that would better suit your needs.

WE BUILD INSTRUMENTS FOR THE MOST IMPORTANT PEOPLE IN THE WORLD . . . YOU

MOD #	TITLE	AVAILABILITY	INCLUDES	PRICE
M-01	HP/LP VCF	SRM, Kitten	panel sw.	$40.00
M-02	12/24dB VCF Rolloff	All models	panel sw.	$40.00
M-03	Manual HPF	All models	panel pot	$45.00
M-04	LFO Square Wave Offset	All models	panel sw.	$40.00
M-05	LFO Monitor	A-1000 series	panel lamp	$40.00
M-06	LFO Delay	A-1000 series	panel pot	$80.00
M-07	LFO Sine Amplitude Control	All models	panel pot jack, pedal	$85.00
M-08	Pitch Bend Interval Control	All models	panel pot	$40.00
M-09	Center-lock Pitch Bend	A-1000 series		$30.00
M-10	Interface Pedal input	All models	jack, pedal	$75.00
M-11	Ganged Modulation Atten.	A-1000, SRM	4 panel sw.	$50.00
M-12	2-Note Memory	A-1000	new keyboard	$225.00
M-13	VCA Pedal Input	All models	jack, pedal	$80.00
M-14	VCO2 Pedal Input	A-1000, SRM	jack, pedal	$75.00
M-15	VCO1 Pedal Input	A-1000 series	jack, pedal	$75.00
M-16	White/Pink noise	All models	panel switch	$40.00
M-17	Keyboard Trigger of S&H	All models	panel switch	$40.00
M-18	Glide on Auto S&H	All models	panel pot	$40.00
M-19	Ring Modulator	A-1000, SRM	3 pots, 2 jacks	$240.00
M-20	VCO1, VCO2, Noise Series Outputs	A-1000, SRM	3 jacks	$50.00
		Kitten	2 jacks	$45.00
M-21	VCF Bypass Switches	A-1000, SRM	3 panel sw.	$50.00
M-22	Input/Output Patching System	A-1000, SRM	11 jacks	$150.00
M-23	Set of SRM panel knobs	A-1000	12 rotary 20 slider knobs	$20.00

PACKAGE PRICES:

P-01 UPGRADE OF A-1000SERIES TO SRM STATUS   price $370.00

This package is recommended for thòse wishing to upgrade the performance
of their A-1000 series CAT to the SRM level.

Package includes:	M-05	LFO monitor	$40.00	
	M-06	LFO Delay	80.00	
	M-09	Center locked pitch bend	30.00	
	M-12	2-Note Memory	225.00	
	M-15	VCO1 pedal input	75.00	(includes pedal)
	M-23	SRM panel knobs	20.00	
		total	$470.00	
		package	370.00	

P-02 ELECTRONIC MUSIC STUDIO PACKAGE   price $650.00

This package upgrades an SRM so that it can be used for electronic music
studio experimentation since it allows the internal devices to interact
with external systems and increases the versatility of the existing modules.

package includes:	M-01	HP/LP VCF	$40.00	
	M-02	12/24dB VCF	40.00	
	M-04	LFO square offset	40.00	
	M-10	Interface pedal	75.00	(includes pedal)
	M-13	VCA pedal input	80.00	(includes pedal)
	M-17	Keyboard trigger on S+H	40.00	
	M-18	Glide on auto S+H	40.00	
	M-19	Ring Modulator	240.00	
	M-21	VCF bypass sw's	50.00	
	M-22	Input/Output patch system	150.00	
		total	795.00	
		package	650.00	

P-03 PERFORMANCE PACKAGE   price $315.00

These modifications are packaged to significantly increase the performance
versatility of the SRM.

package includes:	M-01	HP/LP VCF	$40.00	
	M-04	LFO square offs.	40.00	
	M-07	LFO sine ampl.	85.00	(includes pedal)
	M-08	Bend interval	40.00	
	M-10	Interface pedal	75.00	(includes pedal)
	M-11	Ganged mod. atten.	50.00	
	M-13	VCA pedal	80.00	(includes pedal)
		total	410.00	
		package	315.00	

M-01 HIGH PASS/LOW PASS VCF SELECTOR SWITCH:

A miniature toggle switch is added to the VCF module. In one position, the VCF becomes a voltage controlled low-pass filter, as it normally is, and attenuates all frequencies above F_c. In the other position, the VCF becomes a voltage controlled high-pass filter and attenuates all frequencies below F_c.

M-02 12/24 dB/octave FILTER SLOPE

A miniature toggle switch is added to the VCF module. In one position, the VCF rolloff is 24dB/octave, as it normally is, and in the other position the rolloff becomes 12dB/octave.

M-03 MANUAL HIGH PASS FILTER

A rotary potentiometer is added to the front panel. This control adjusts the cutoff of a passive, manually set (not voltage controlled), highpass filter. The cutoff range is approximately 20Hz to 10Khz with a rolloff of -6dB/octave. The filter is placed inbetween the VCF and VCA modules.

M-04 LFO SQUARE WAVE OFFSET SWITCH

A miniature toggle switch is added to the panel. In one position, the LFO square wave alternates between ground and a positive voltage, while in the other position, the square wave alternates between balanced plus and minus voltages. This allows LFO square wave modulations above and below a reference or only above the reference.
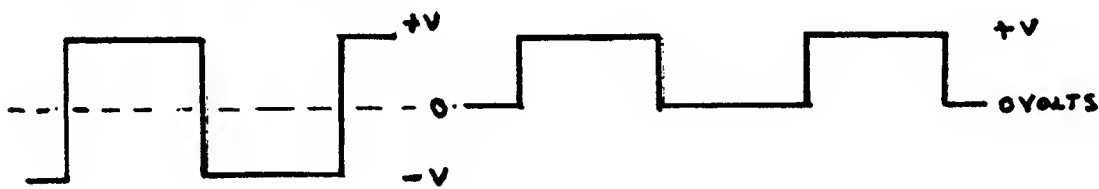
Square wave without offset

Square wave with offset

M-05 LFO MONITOR LAMP

An LED monitor lamp for the LFO frequency (similar to that on the SRM and kitten synthesizers) is added to the A-1000 series CAT synthesizers.

M-06 LFO DELAY

A rotary potentiometer is added to the front panel of the A-1000 series CAT synthesizer to control the delay time of the LFO sine wave. This delay is trigger sensitive and is continuously variable from 0 to 5 seconds. The resulting effect is similar to that of the SRM and Kitten LFO delay.

M-07 LFO SINE AMPLITUDE CONTROL (includes foot pedal)

A rotary potentiometer is added to the panel near the pitch bend slider.
Also, a jack is added to the rear of the unit. When the foot pedal supplied
is plugged into this jack, the LFO sine amplitude can be varied from zero
to full with the pedal; the panel pot controls the pedal sensitivity.

When the pedal is not used, the panel pot determines the LFO sine amplitude.

This modification also allows external voltage control of the LFO sine wave
amplitude. The tip of the pedal cable is the control voltage input. Thus,
a mono cable plugged into this jack will allow external voltage sources to
control the LFO sine amplitude.

Note that this modification turns the LFO triangle wave on A-1000 series CATs
into a sine wave.
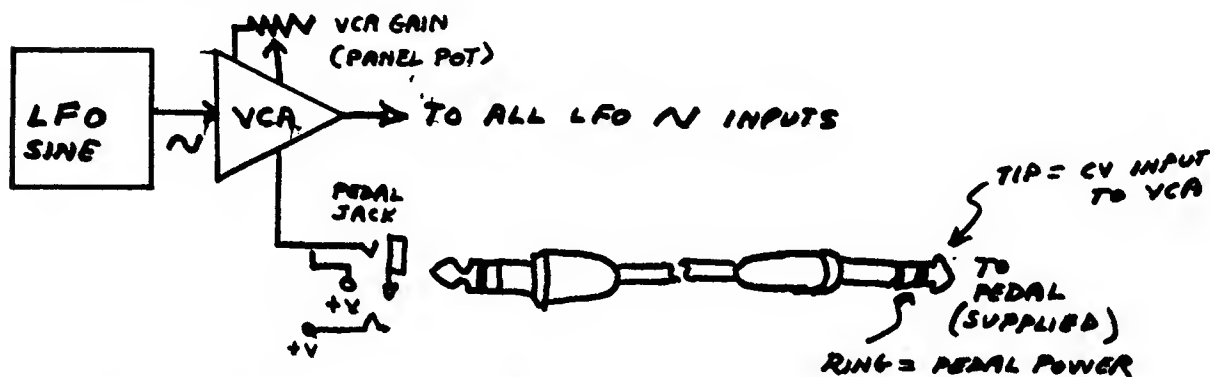
The LFO sine wave can be controlled by the panel pot, foot pedal,
or by an external modulation source

M-08 PITCH BEND INTERVAL CONTROL

A rotary potentiometer is added to the front panel near the pitch bend
slider. When fully counter clockwise, the ends of the pitch bend slider
will shift the pitch of the unit by about 1 semitone. When the interval
control is fully clockwise, the ends of the pitch bender are about
2 octaves up and down. Thus, the interval control allows variations in
pitch bend sensitivity from about one semitone to about plus and minus
two octaves.

M-09 CENTER LOCKING PITCH BEND SLIDER

The pitch bend slider on the A-1000 series CAT is replaced with a center
locking pitch bend as on the SRM and kitten.

M-10 INTERFACE PEDAL INPUT (includes foot pedal)

A stereo jack is added to the rear of the instrument. The tip of this
jack provides a 1 volt per octave input to the interface circuitry on the
synthesizer. A voltage applied to this jack will shift the pitch of the
entire unit in the same way as the pitch bender shifts the pitch of the
entire unit.

When the pedal supplied is inserted into this jack, the pitch of the unit
can be bent upwards with it. The range of the pitch bend is controlled by
the sensitivity control on the pedal.

M-11 GANGED MODULATION ATTENUATORS

A miniature toggle switch is added below each of the two VCO2 modulation
attenuators and the two VCF modulation attenuators. These switches cause the
attenuators above them to become slaves to the VCO1 modulation attenuators.
When the switch is on, the attenuator above it is disconnected from its
modulation selector switch and is instead connected to the wiper of the
respective VCO1 modulation attenuator.

This is useful for controlling the modulation depth of VCO 1, VCO 2 and the
VCF with only the VCO 1 modulation depth controls. The figure   should make this
this function obvious.
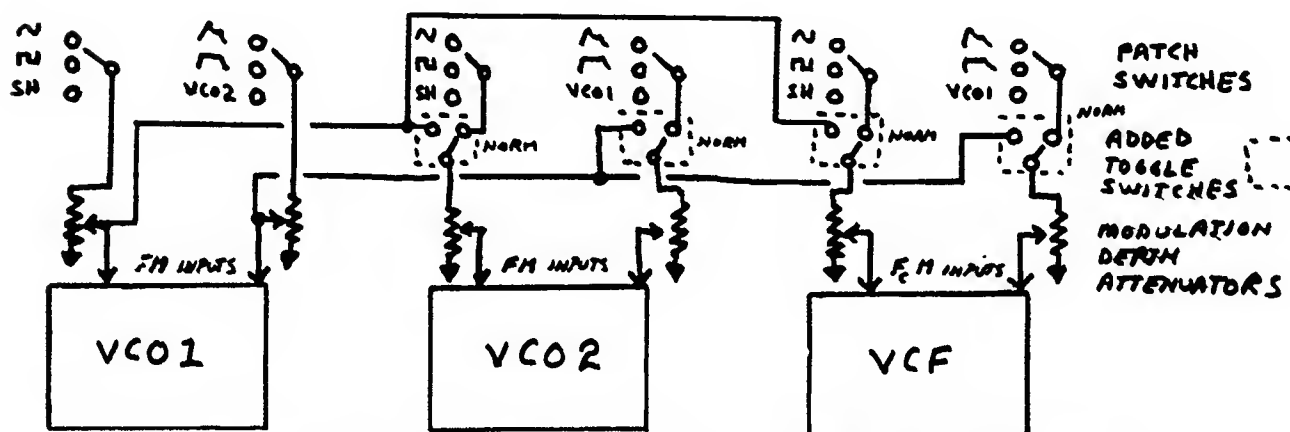
The added switches allow the VCO2 and VCF modulation depths to
be governed by the VCO1 modulation depth settings
so that all three modules can be varied with one
or two rotary knobs.

M-12 2-NOTE MEMORY

The CAT series A-1000 memory system is upgraded to that of the SRM by adding
a memory to the second note. The keyboard and internal memory circuitry are
replaced (factory retains old keyboard) with the new SRM keyboard and
circuitry. The external appearance of the unit is not altered.

The second memory allows the CAT second voice to be memorized after releasing
the key so that both oscillators maintain the interval that was played before
the keys were released.

M-13 VCA CONTROL VOLTAGE INPUT (includes pedal)

A stereo jack is added to the back of the unit to allow access to the VCA control voltage input. This jack can be used to control the volume with a footpedal (included) or to allow an external device with a 0 to +10V range to modulate the VCA.

The tip of the jack is connected to the control voltage input of the VCA and the ring of the jack is connected to the modulation select switch of the VCA. If the pedal is inserted, the modulation depth of the VCA is controlled by the pedal setting. The VCA volume control serves as a pedal sensitivity control.

If a $\frac{1}{4}$" mono cable is inserted into the jack, the modulation select switch is disconnected and the tip of the cable provides access to the control voltage input of the VCA. Allowable control voltage range is from 0 to +10V.
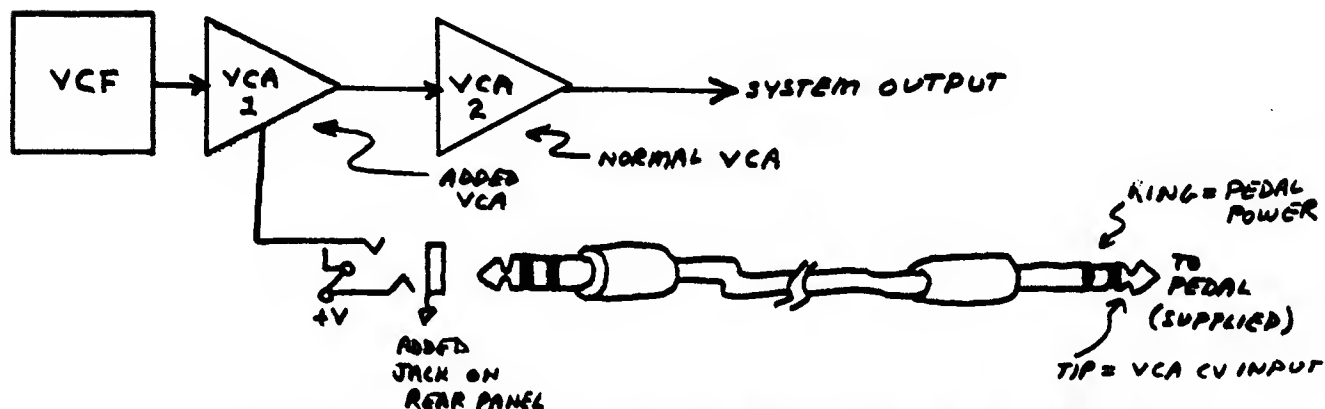
An extra VCA allows pedal control and external source control
of the entire instrument's volume level

M-14 VCO2 SWEEP PEDAL INPUT (includes pedal)

A stereo jack is added to the rear of the unit to allow pedal sweeping of the VCO2 frequency similar to that of the VCO1 pedal input in the SRM and KITTEN. The tip of this jack is connected to the VCO2 control voltage input and provides a 1 volt/octave control voltage input to VCO2. A pedal is supplied with this modification.

M-15 VCO1 SWEEP PEDAL INPUT (includes pedal)

Same as VCO2 modification M-14 except for VCO1. This allows A-1000 series CATS to be upgraded to the SRM level.
Pedal supplied.

M-16 WHITE/PINK NOISE SWITCH

A miniature toggle switch is added to the noise module to provide selection between white and pink noise.

M-17 KEYBOARD TRIGGERING OF AUTO S&H

A miniature toggle switch is mounted near the S&H switch. In one position, the S&H is triggered by the LFO, as it normally is. In the other position, the keyboard trigger controls the S&H and a new sample is taken on every keyboard trigger.

4

M-18 GLIDE CONTROL ON AUTO S&H

A rotary potentiometer is added to the panel to control the glide between
sample steps. This allows gliding between notes when modulating the VCO'S
with the S&H output.


M-19 RING MODULATOR

A 4-quadrant multiplier is added to the internal circuitry of the
synthesizer to provide true ring modulation. One of the ring modulator
inputs is connected to the VCO1 mixer output and the other input is
connected to the VCO2 mixer output, thus allowing ring modulation
between any of the mixed waveshapes of the 2 VCO'S. The ring modulator
inputs are also connected to $\frac{1}{4}$" mono jacks mounted on the rear of the
unit. When a cable is inserted into either jack, the respective VCO
is disconnected and replaced with the outside signal source. This
allows either VCO to modulate an outside source. Each input is provided
with a rotary attenuator. The output of the ring modulator is connected
to the VCF through a rotary volume control to allow mixing of the ring
modulation effects with the standard synthesizer sounds.
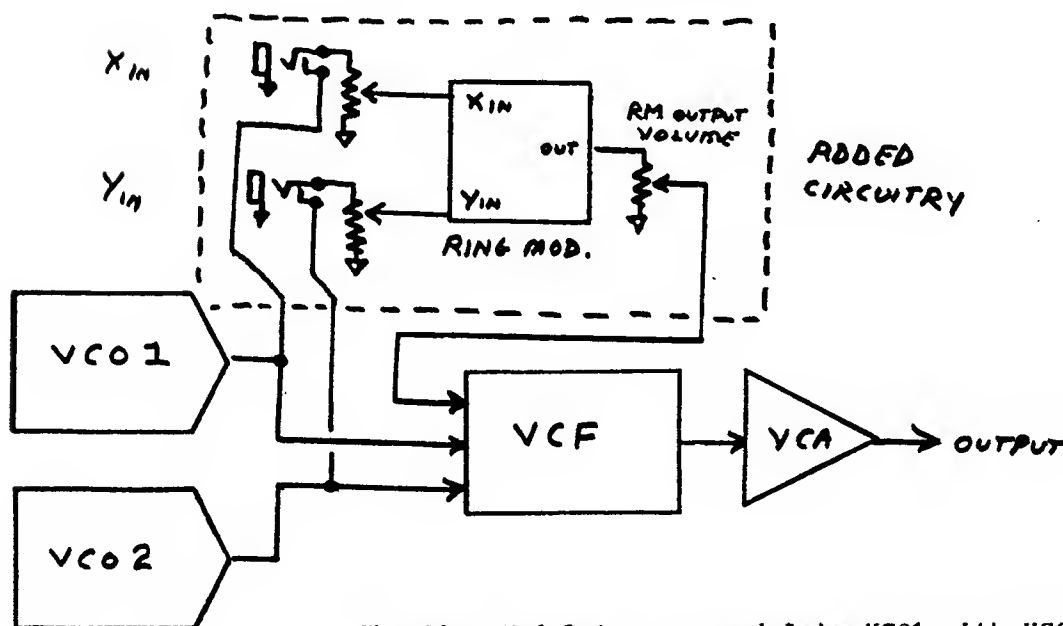
The Ring Modulator can modulate VCO1 with VCO2 or with
external sources patched into the X and Y
attenuated inputs.

Three stereo jacks are added to the back of the unit to allow access to the
outputs of VCO1, VCO2 and noise for processing by external modifiers. The
jacks are connected in such a way that if a stereo cable is plugged in, the
tip of the stereo cable is the output of the respective module, and tne ring
is the input back into the VCF. This allows modifiers such as phase shifters,
delay lines, fuzz boxes etc. to be placed in series between either VCO1,
VCO2, or the noise and the VCF.
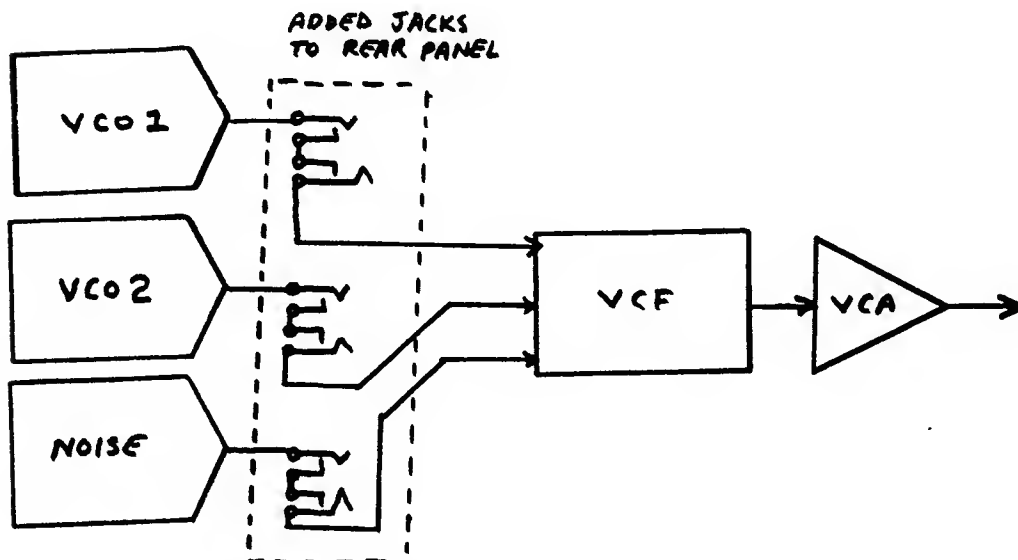
By adding these patching jacks, external modifiers can be connected in series with
the sound sources.

M-21 VCF BYPASS SWITCHES FOR VCO1, VCO2, AND NOISE

Three miniature toggle switches are added to the panel to allow the
noise, VCO1 and VCO2 modules to bypass the VCF and instead go directly
to the VCA. This allows certain modules to be modified by the VCF and
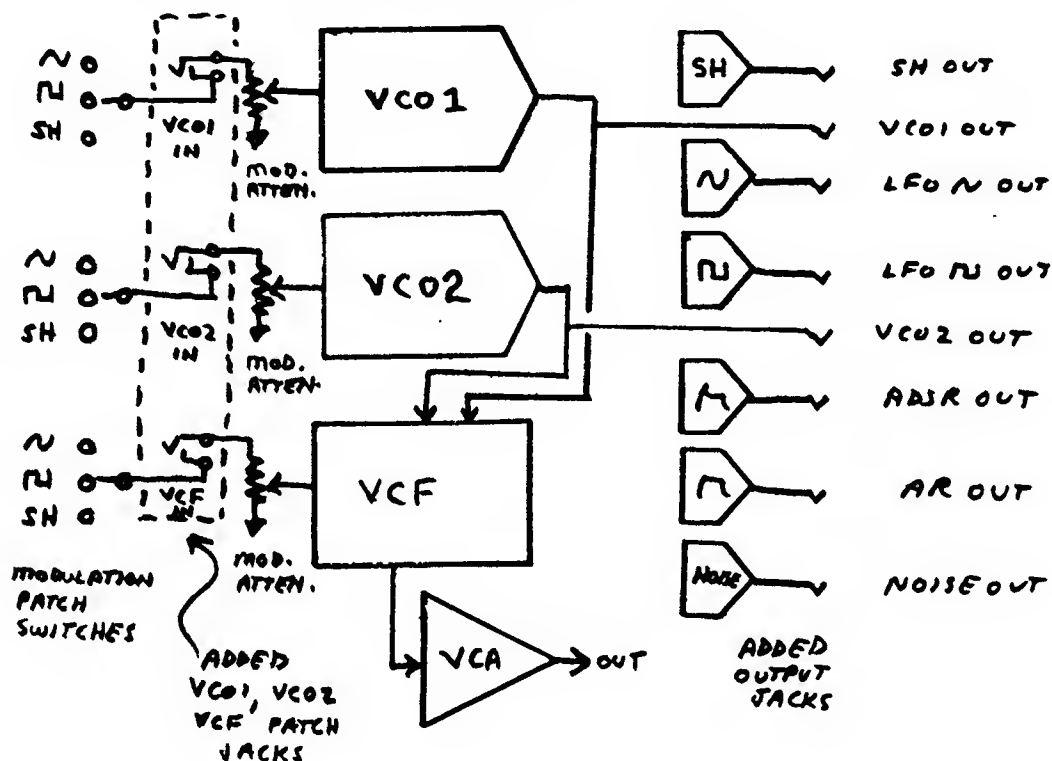others to be unaffected, thus extending the ability to create complex timbres.
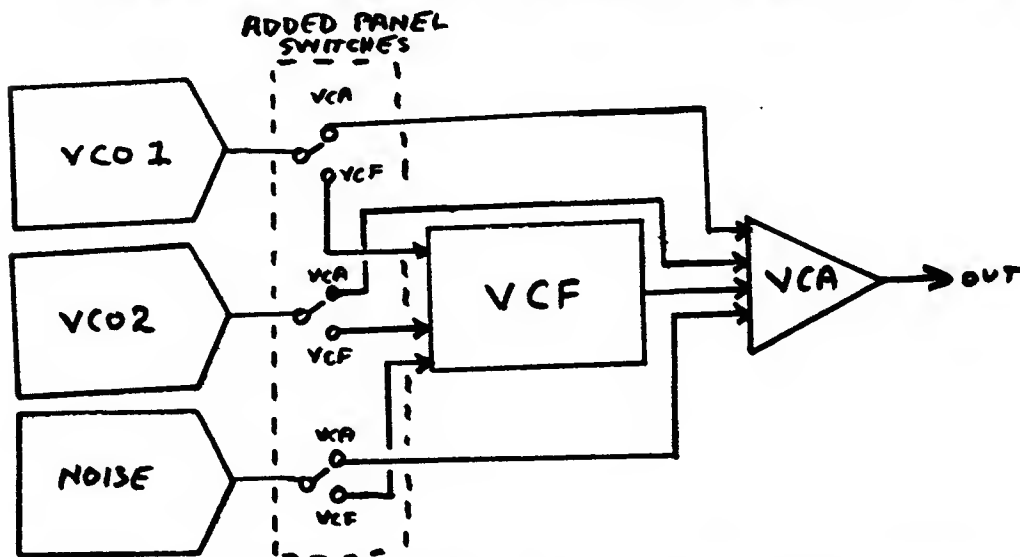
By adding these bypass switches, the sound sources can bypass the VCF and go
directly to the VCA
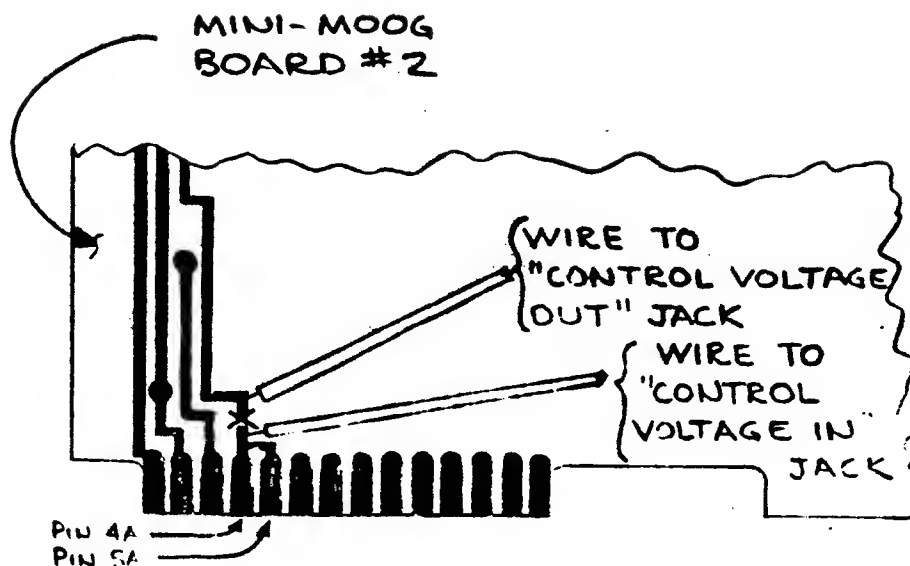
M-22 INPUT/OUTPUT PATCHING SYSTEM

The outputs of the LFO sine, square, ADSR, AR, S&H, VCO1, VCO2 mixers and noise are brought to back panel jacks without disrupting their initial internal connections. This allows access to all of these modules for external processing. VCO1, VCO2, and VCF each are given an external extra modulation input for a total of 11 jacks.

These three inputs are connected in series with the first patch switch and modulation attenuator for VCO1, VCO2 and VCF. When a plug is inserted into one of these jacks, the mod source switch is disconnected and replaced by the external mod source. The attenuator normally corresponding to the disconnected mod source switch controls the external input mod depth. This mod is suggested for electronic music studio applications since it allows much more modulation capabilities and integrated processing of synthesizer signals with external modifiers.
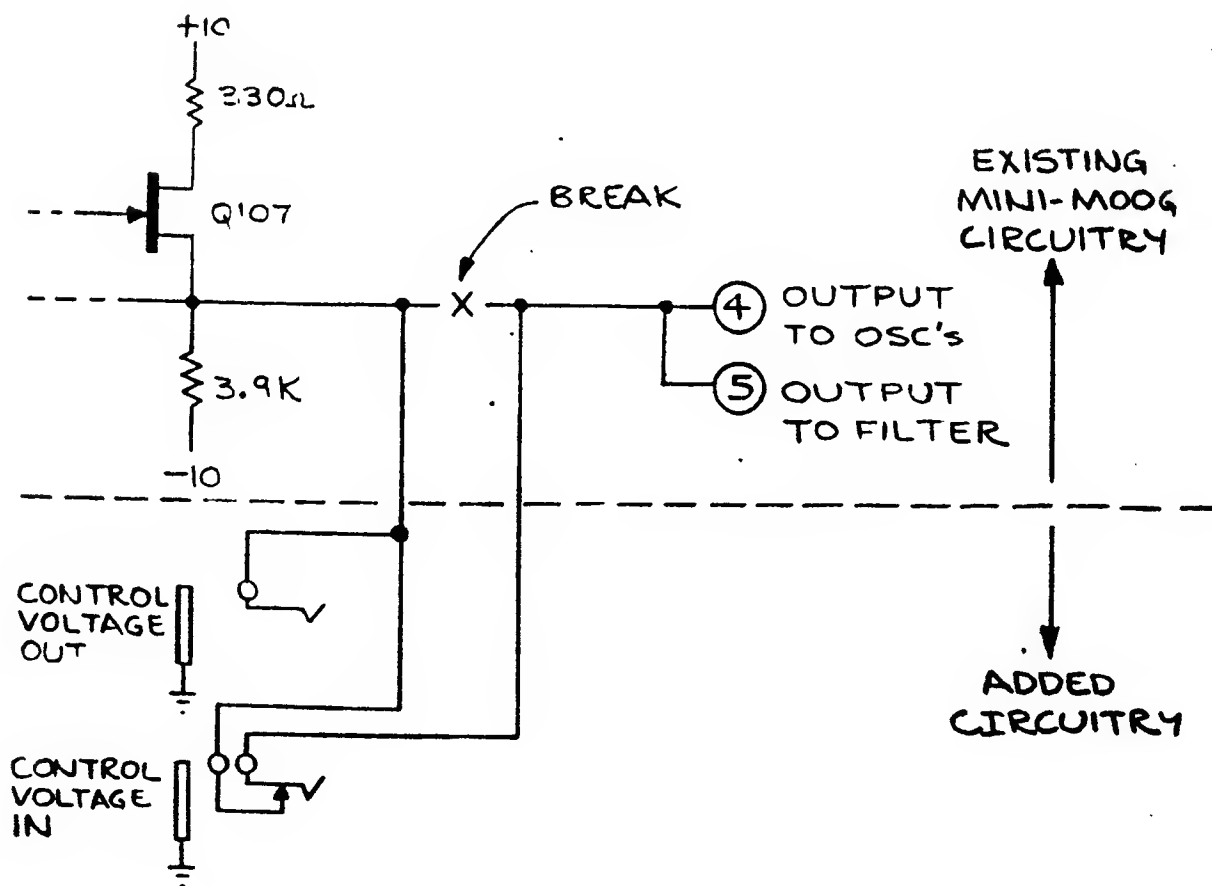

M-23 KNOBS

A set of knobs and applicator tool to update the A-1000 to SRM status.

MINI-MOOG
BOARD #2

WIRE TO
"CONTROL VOLTAGE
OUT" JACK

WIRE TO
"CONTROL
VOLTAGE IN"
JACK

PIN 4A
PIN 5A

FIGURE

+10

330Ω

Q'07

BREAK

EXISTING
MINI-MOOG
CIRCUITRY

④ OUTPUT
TO OSC's

3.9K

⑤ OUTPUT
TO FILTER

X

−10

CONTROL
VOLTAGE
OUT

ADDED
CIRCUITRY

CONTROL
VOLTAGE
IN

SCHEMATIC

MINI-MOOG
MODIFICATIONS
FOR USE WITH